

## Descrizione / Description / Description

Pannello doccia esterno con rubinetto temporizzato e soffione anti impiccagione con getto orientabile.  
*External shower panel with self-closing panel and antiligature shower head with adjustable jet.*  
*Panneau douche extérieur avec robinet temporisé et pomme anti pendaison avec jet orientable.*

## Materiali / Materials / Matériels

### Componenti in finitura

*Finishing components*

*Composants en finition*

Ottone/Brass/Laiton (EN12164 EN12165)

Inox 304 /304 stainless steel / acier inoxydable 304

### Componenti torniti

*Machined components*

*Composants tournés*

Ottone/Brass/Laiton (EN12164 EN12165)

### Guarnizioni

*Gaskets*

*Joints*

EPDM

### Componenti plastica

*Plastic components*

*Composants en plastique*

POM

### Finitura superficiale

*Surface finishing*

*Finition de la surface*

Conforme/According/Conformément EN 248

In accordo alla EN 9227 in merito all'aggressione salina

*According to EN 9227 regarding saline aggression*

*Conformément à la norme EN9227 concernant l'agression saline*

## Varianti / Options / Options

Sistema antivandalo/ *Anti-vandal / Bloc anti-vandale*

Regolazione tempo/ *Time regulation / Régulation du temps*

Regolazione flusso/ *Flow regulator / Limiteur du débit*

Limitatore flusso/ *Flow regulation / Régulateur de débit (5-6-8 l/min)*


Durata flusso a richiesta / *Closing time on demand / Temps de fermeture sur demande*

3 sec (±1)      5 sec (±2)      10 sec (±3)

14 sec (±4)      20 sec (±8)      40 sec (±10)

## Caratteristiche / Features / Caractéristiques


 5-70 °C

 Min 0,5 bar- Max 6 bar  
2-4 bar Consigliata / *Recommended / Recommandé*

 EN 816

 15 l/min (3 bar)

  G1/2"

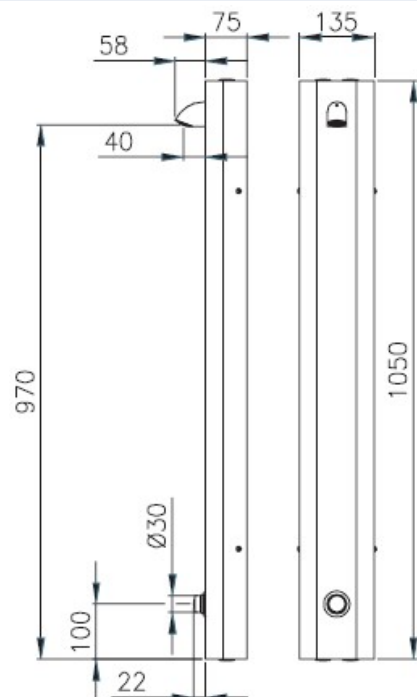

100% Made in Italy



Water saving up to 85%



15 Years Warranty

